
Movs 3015 PT Combi

Plate with tube, cover and platform

- Side electric door for easy loading and unloading
- Embedded touch control screen
- Pipe cutting options: 3 meters and 6 meters



Technical information and options

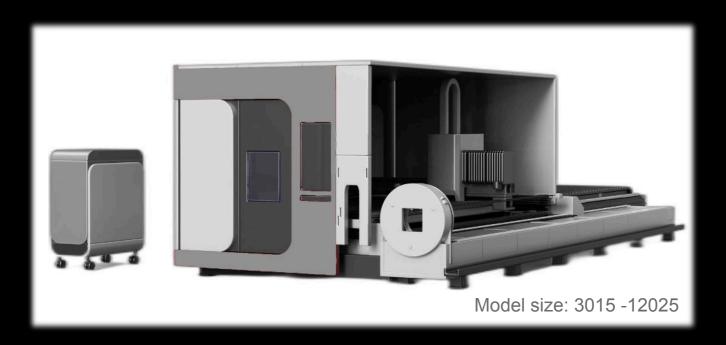







Parameters

MODEL	SL3015CP	SL4020CP	SL6025CP	SL8025CP	SL0025CP	SL12025CP
X-axis stroke (mm)	3 100	4 100	6 100	8 100	10 100	12 100
Y-axis stroke (mm)	1 600	2 100	2 600	2 600	2 600	2 600
Max running speed (m/min)	100	100	100	100	100	100
Maximum acceleration	1,5 G	1,5 G	1,5 G	1,5 G	1,5 G	1,5 G
Positioning accuracy (mm)	±0,03	±0,03	±0,03	±0,03	±0,03	±0,03
Repetitive positioning accuracy (mm)	±0,02	±0,02	±0,02	±0,02	±0,02	±0,02
Power range	1 000 - 12 000 W					

Samples



