


# Movs Exchange Laser

- The entire design is based on the idea of humanism and is adapted to the industrial conditions in which people work.



- The bottom of the bed is designed to be fully closed to ensure smoke release.

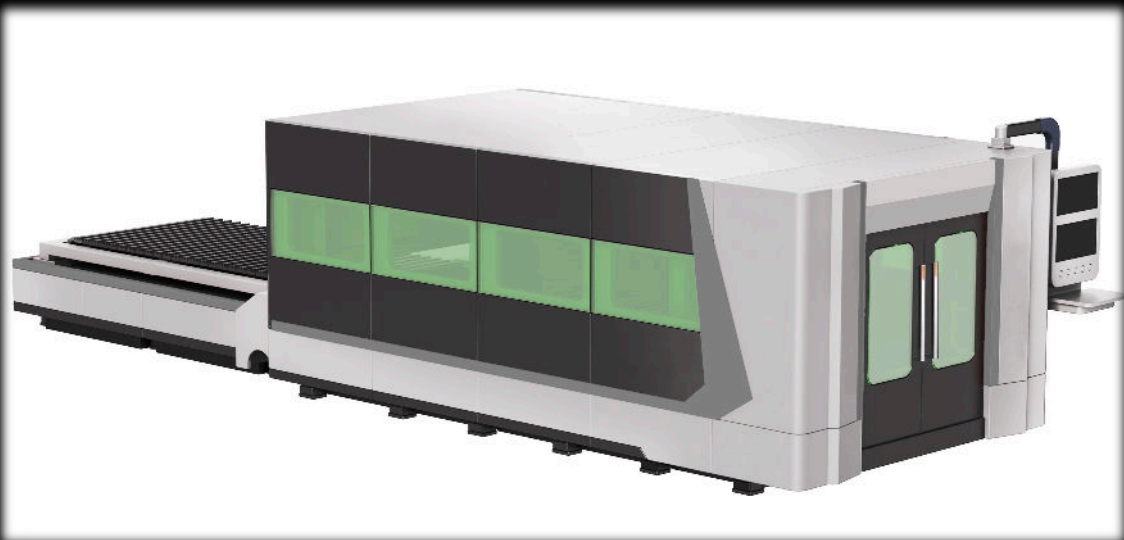

- Suspended drag chain ensures that the cutting head and fiber optic cable do not separate.



## Parameters

MODEL	SL3015CP	SL4020CP	SL6025CP	SL8025CP	SL0025CP	SL12025CP
X-axis stroke (mm)	3 100	4 100	6 100	8 100	10 100	12 100
Y-axis stroke (mm)	1 600	2 100	2 600	2 600	2 600	2 600
Max running speed (m/min)	100	100	100	100	100	100
Maximum acceleration	1,5 G	1,5 G	1,5 G	1,5 G	1,5 G	1,5 G
Positioning accuracy (mm)	±0,03	±0,03	±0,03	±0,03	±0,03	±0,03
Repetitive positioning accuracy (mm)	±0,02	±0,02	±0,02	±0,02	±0,02	±0,02
Power range	1 000 - 12 000 W					

## Samples

